



Hexagonal expanded meshes




E 3

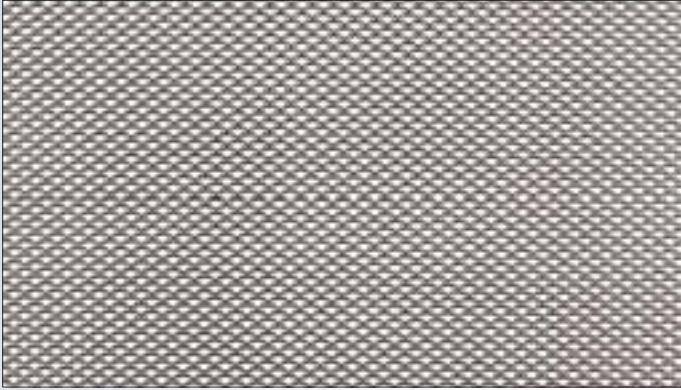

E 6

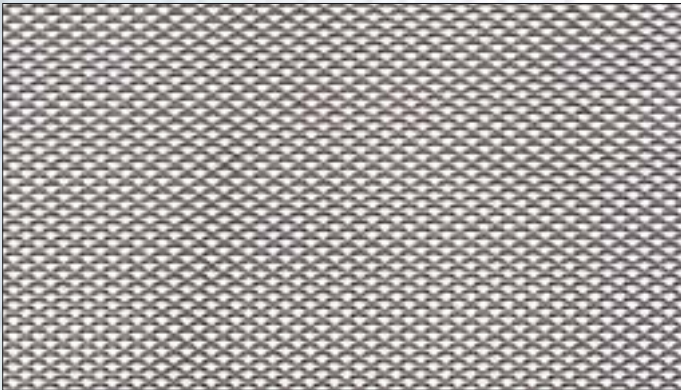


E 3,5

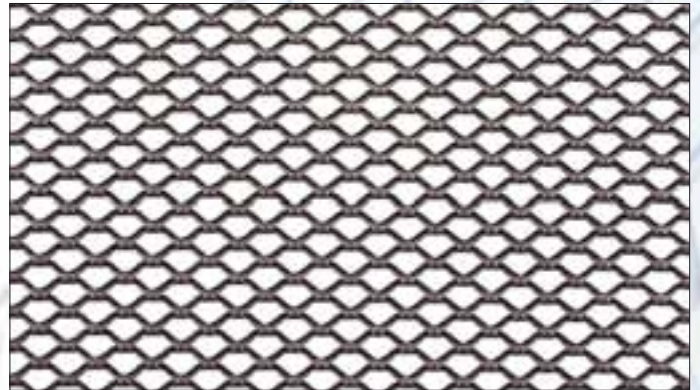

E 8



E 4

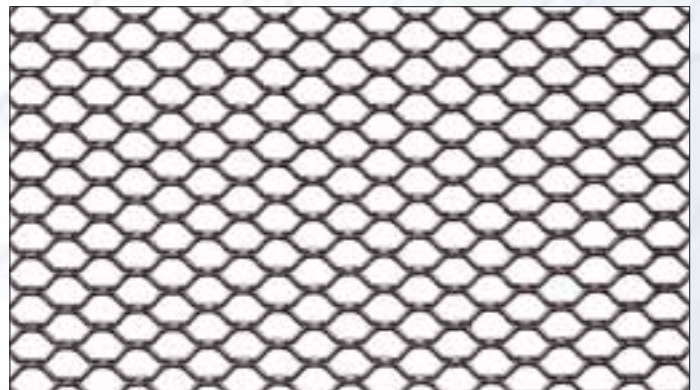


E 10




E 5




E 15

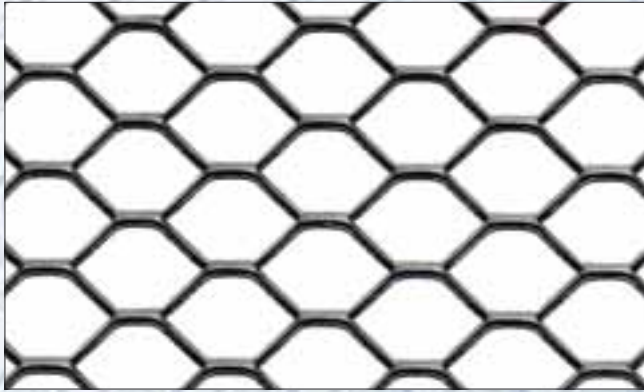

E 25

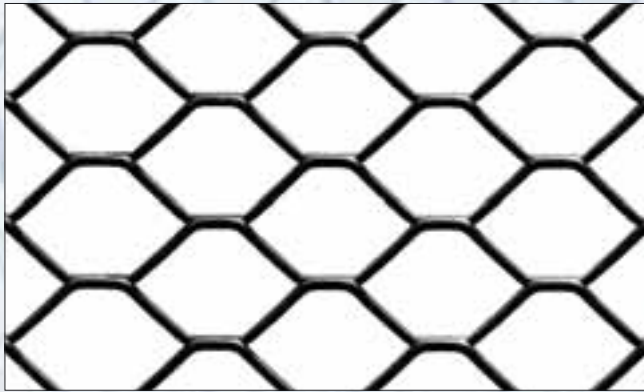

E 30

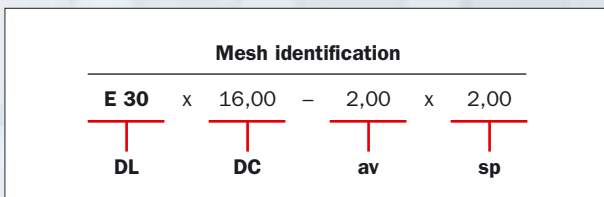

Mesh produced in all materials, in rolls or sheets, standard or personalised thickness and shapes.


The most popular strand thickness sizes are shown.

The weights given are approximate only, depending on the material chosen and the short way of the mesh.

The Kg per m² figure applies to mild steel or stainless steel material.

Meshes shown life-size, but please allow for photo tolerances.

DL mm	DC mm	Strand width av/mm	Strand thickness sp/mm	Weight kg/m ²	Maximum width of sheet/coil mm
E 3	2,00	0,50	0,40	1,600	625
	2,00	0,50	0,50	2,000	625
	2,00	0,50	0,60	2,400	625
E 3,5	2,30	0,55	0,40	1,550	625
	2,30	0,55	0,50	1,900	625
	2,30	0,55	0,60	2,300	625
E 4	3,00	0,65	0,50	1,700	1000 - 1250
	3,00	0,65	0,60	2,050	1000 - 1250
	3,00	0,65	0,80	2,750	1000 - 1250
E 5	3,20	0,80	0,50	2,000	1000 - 1250
	3,20	0,80	0,60	2,400	1000 - 1250
	3,20	0,80	0,80	3,100	1000 - 1250
E 6	3,50	0,80	0,60	2,100	1000 - 1250
	3,50	0,80	0,80	2,750	1000 - 1250
	3,50	0,80	1,00	3,450	1000 - 1250
E 8	4,70	0,80	0,60	1,900	1000 - 1250
	4,70	0,80	0,80	2,400	1000 - 1250
	4,70	0,80	1,00	2,800	1000 - 1250
E 10	5,00	1,00	0,60	1,900	1000 - 1250
	5,00	1,00	0,80	2,550	1000 - 1250
	5,00	1,00	1,00	3,100	1000 - 1250
E 15	6,50	1,30	0,60	1,900	1000 - 1250
	6,50	1,30	0,80	2,550	1000 - 1250
	6,50	1,30	1,00	3,150	1000 - 1250
E 25	13,00	1,50	1,00	1,850	1000 - 1250 - 1500
	13,00	2,00	1,50	3,600	1000 - 1250 - 1500
	13,00	2,00	2,00	4,500	1000 - 1250 - 1500
E 30	16,00	1,50	1,00	1,500	1000 - 1250 - 1500
	16,00	1,50	1,50	2,250	1000 - 1250 - 1500
	16,00	2,00	2,00	3,400	1000 - 1250 - 1500

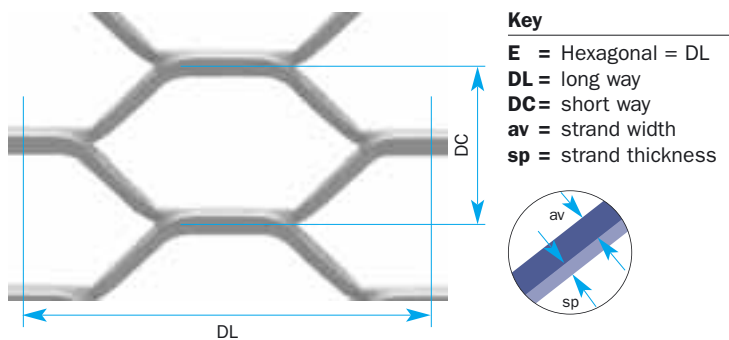

HEXAGONAL